

FIG. 1

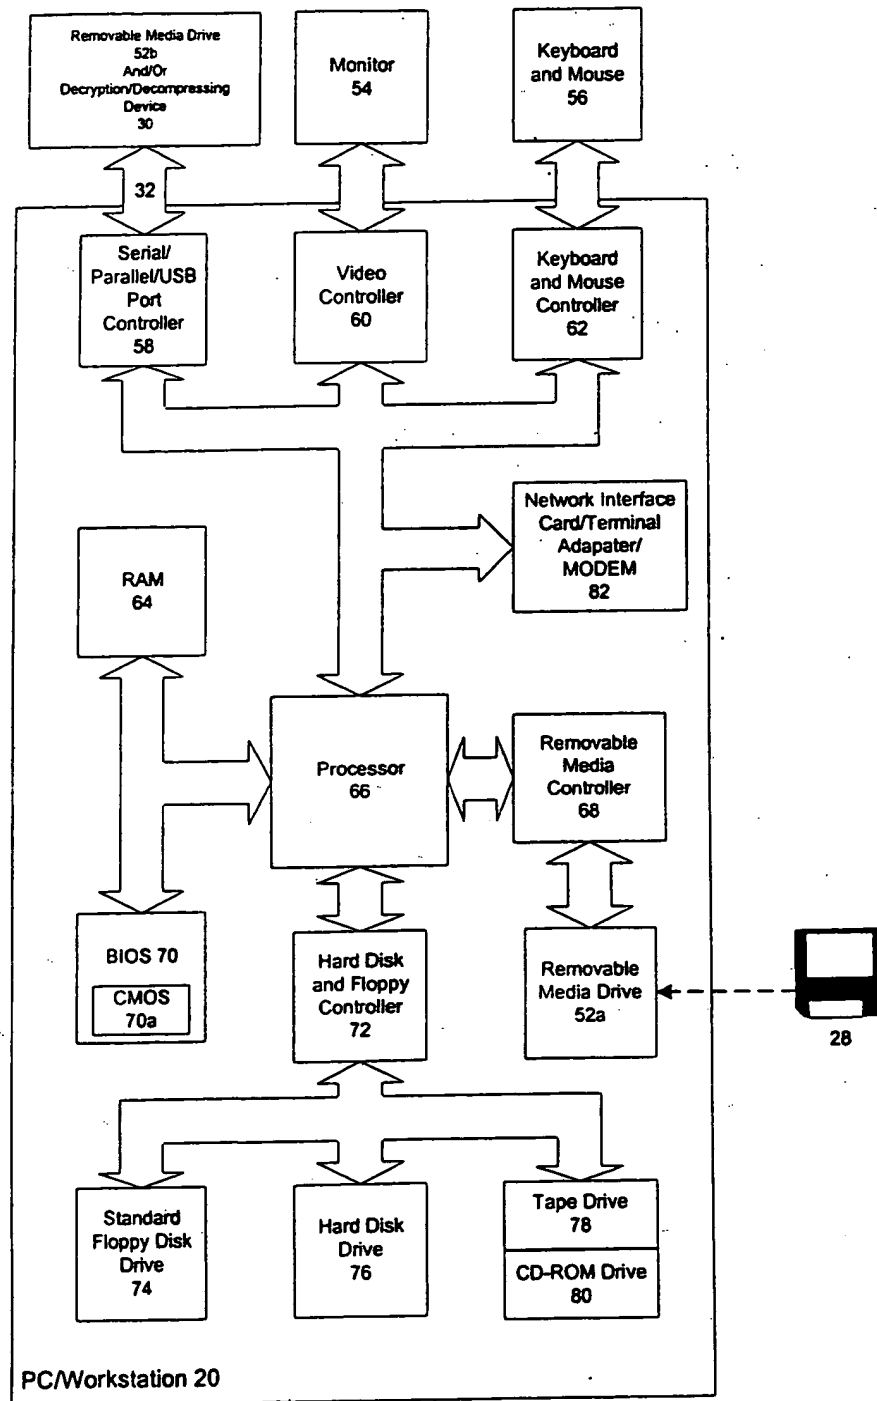


FIG. 2

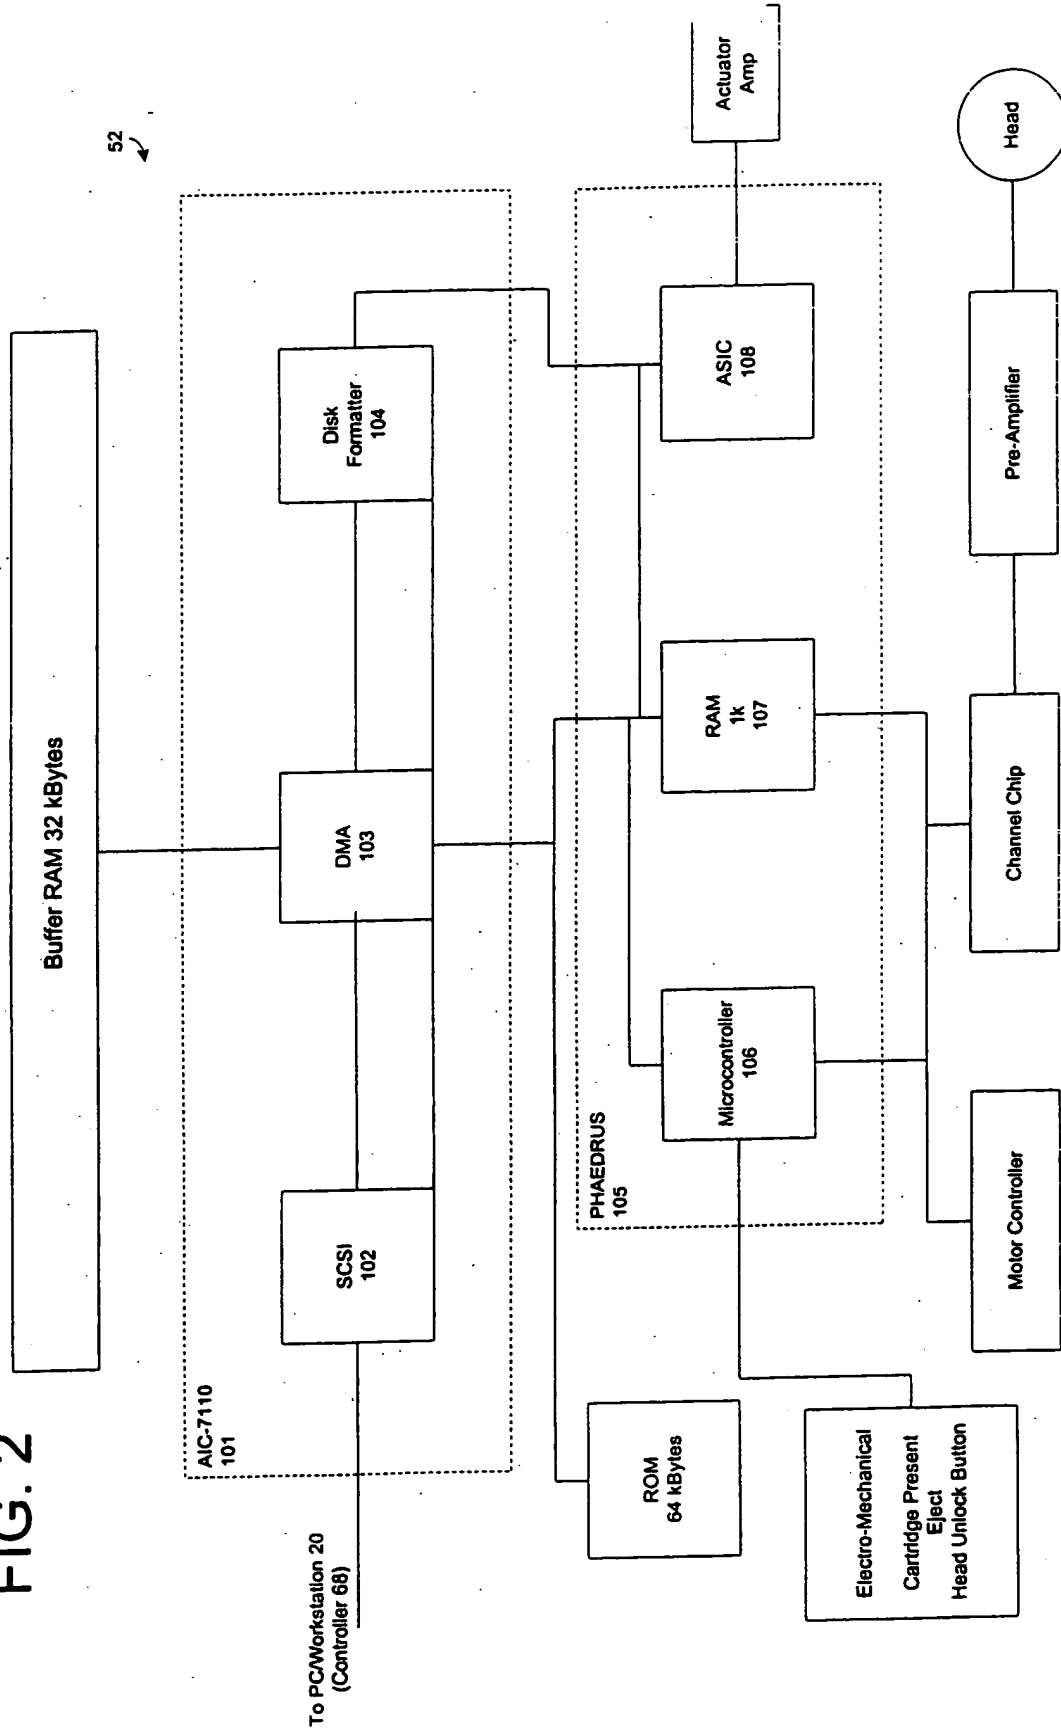


FIG. 3

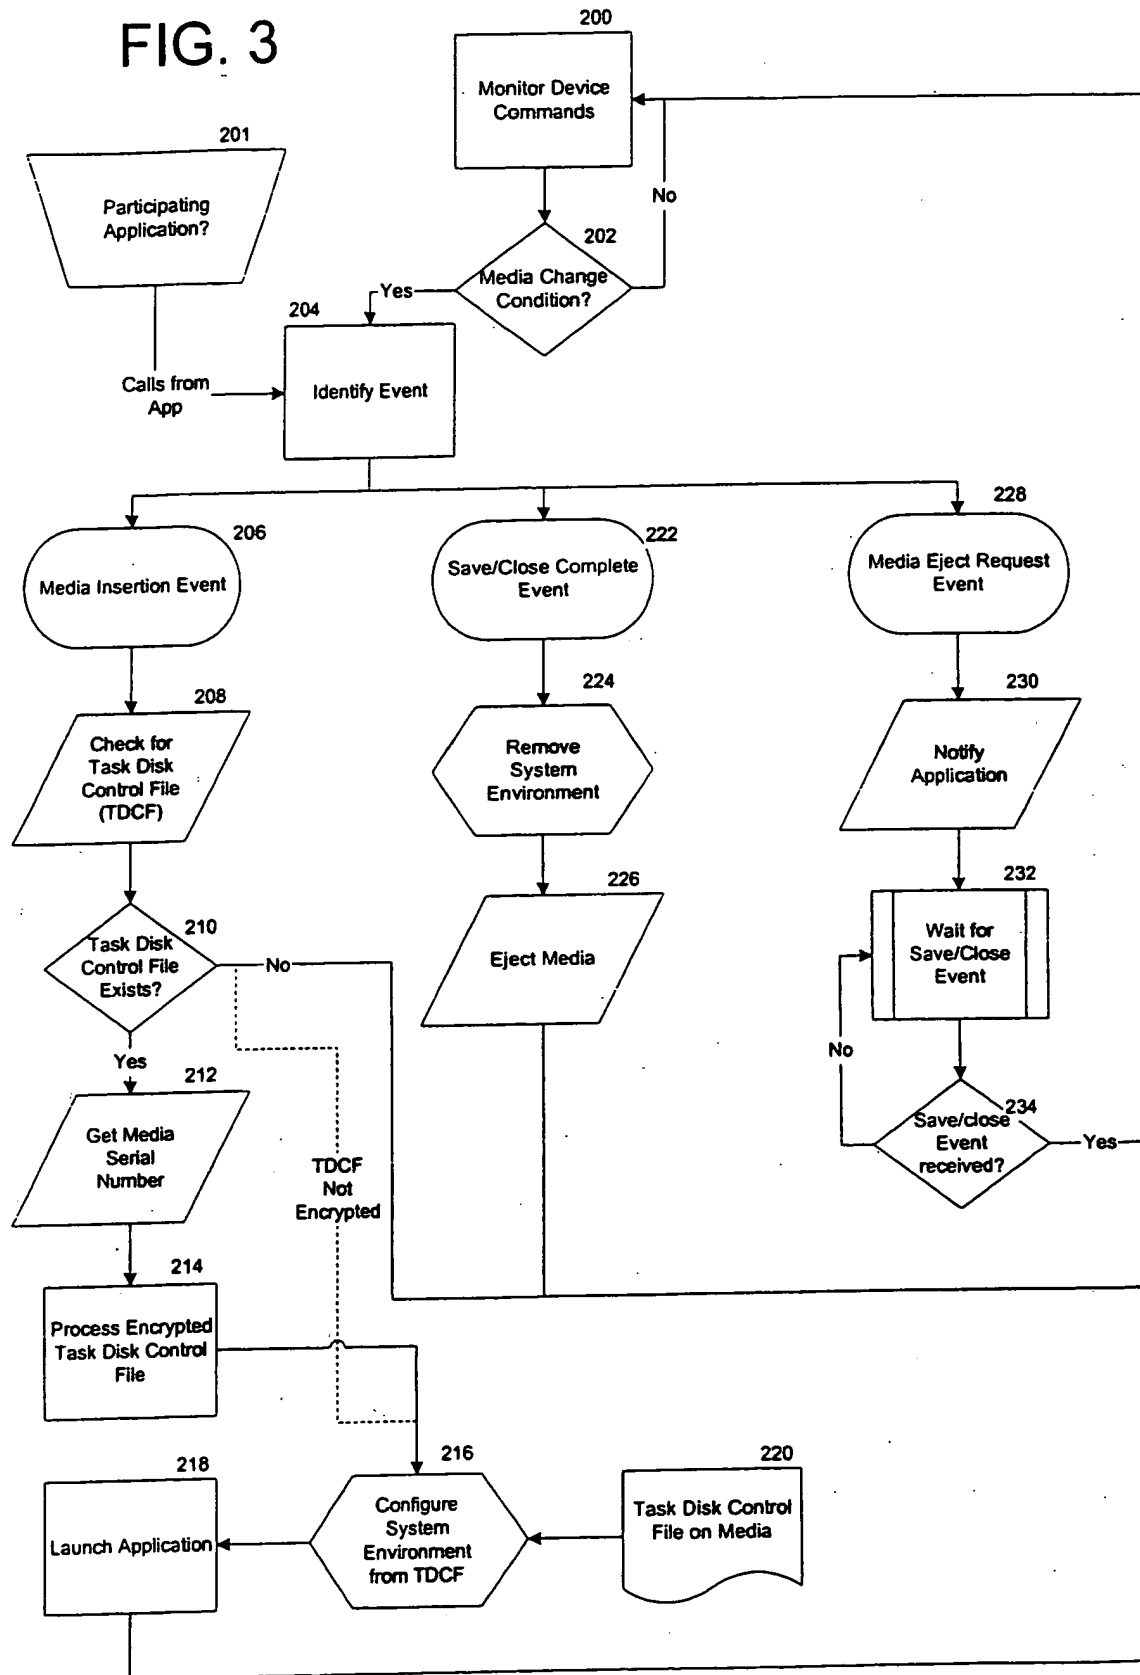


FIG. 4

```
#####
#
#   Task disk control file example
#
#####

#####
# symbols
#   [ ] - indicates a registry Key
#   + - add or modify a registry value
#   - - remove registry Item
#   { } - section header
#####

#----- Pre-run section -----
{ PRE-RUN }
    +[HKLM\Software\Iomega\APP\]
        +RunPath="$:\app1\app1.exe"
    +[HKCR\myapp]
        +Default="MYAPPICON"
    +[HKCR\MYAPPICON\shell\command\Open]
        +Default="$:\app1\app1.exe %1"

    # if we need to pre-load an application:
    load=$:\preloadapp.exe

#----- Application run section -----
{ RUN }
    load=$:\app1\app1.exe

#----- clean-up section -----
{ POST-RUN }
    -[HKLM\Software\Iomega\APP\]
    -[HKCR\myapp]
    -[HKCR\MYAPPICON\shell\command\Open]

    # if we need to post-load an application:
    load=$:\prostloadapp.exe
```

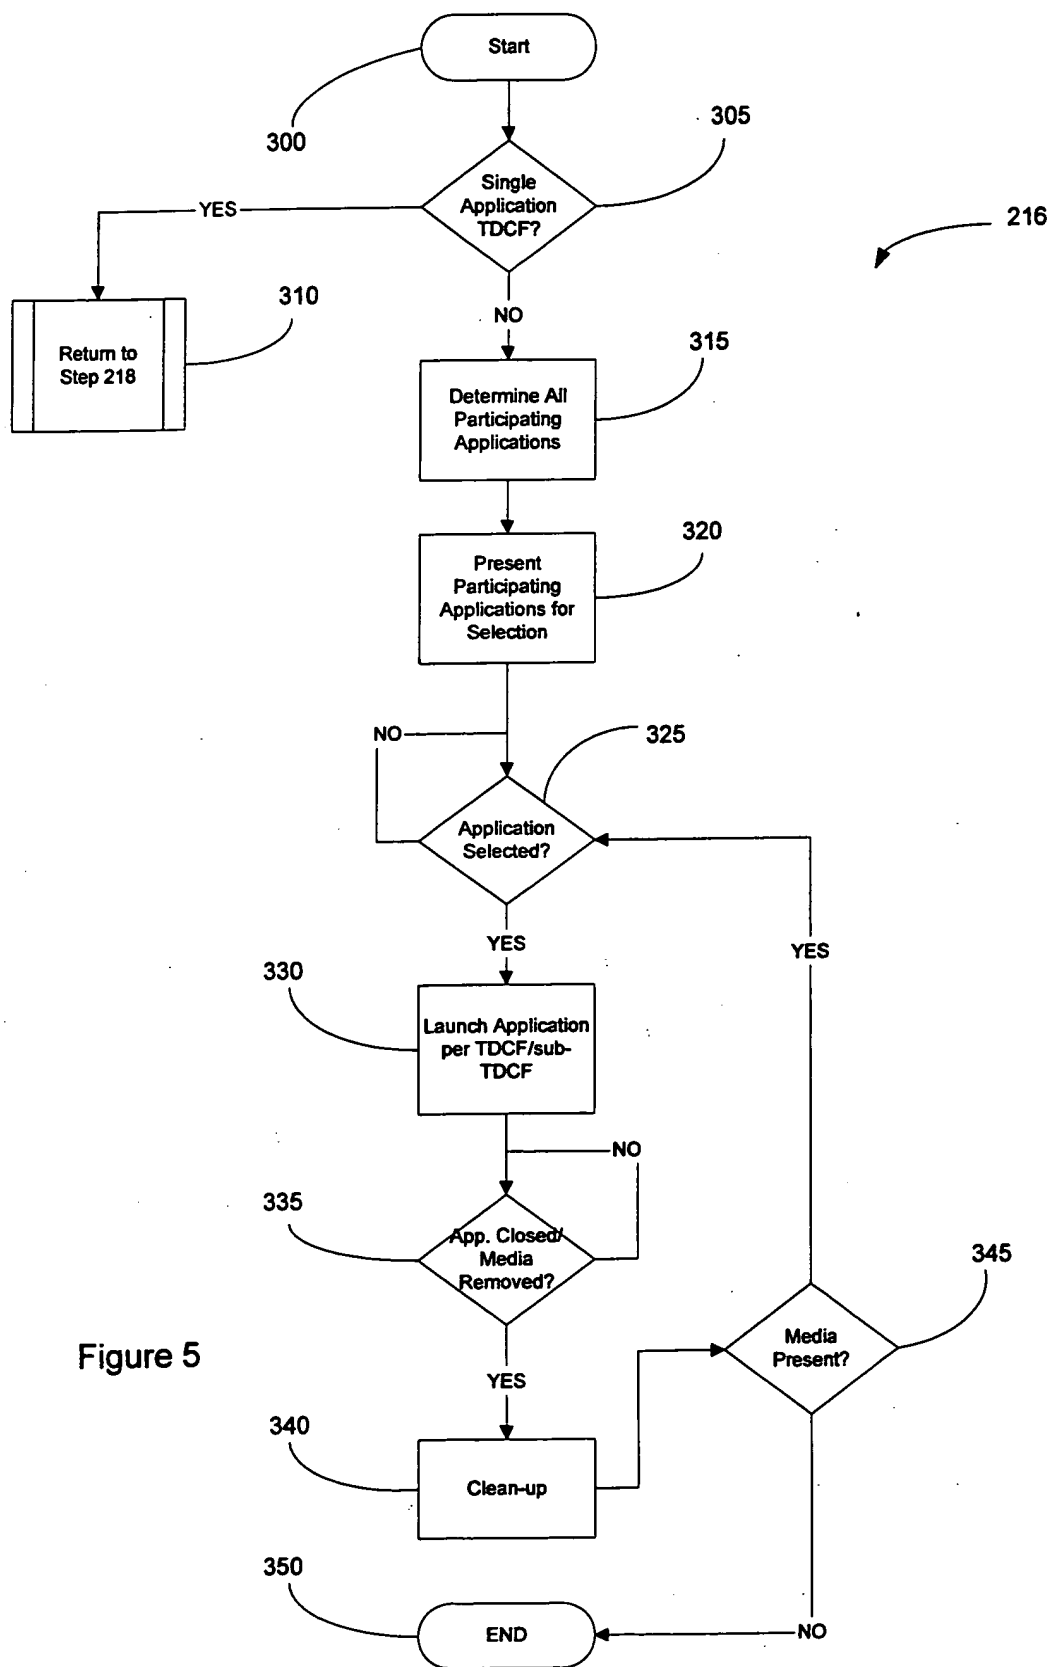


Figure 5